


# BUSSOLE PB

Bussole guida con collare temprate

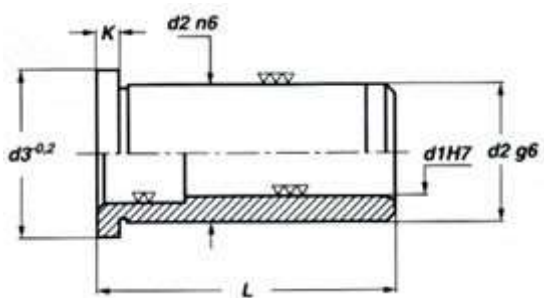

MATERIALE: Acciaio UNI 16NiCr4 60-62 HRC

d1	12	14	16	18	20	25	32	40	50	60	
d2	18	20	22	26	28* 30	34* 36	40	48	60	74	
d3	22	24	26	30	32* 34	38* 40	45	52	65	80	
K	5	5	5	5	6	7	7	8	10	12	
L	22	•	•	•	•	•					
	26	•	•	•	•	•	•	•			
	36	•	•	•	•	•	•	•	•		
	46	•	•	•	•	•	•	•	•		
	56	•	•	•	•	•	•	•	•		
	66		•	•	•	•	•	•	•		
	76		•	•	•	•	•	•	•	•	
	86			•	•	•	•	•	•	•	
	96			•	•	•	•	•	•	•	•
	106					•	•	•	•	•	•
	116					•	•	•	•	•	•
	126					•	•	•	•	•	•
	136							•	•	•	
	146							•	•	•	•
156									•	•	
176										•	

Per ordinare specificare PB d1 x L es. PB 25 x 76

\* Attenzione per diametro d1= 20 e 25 specificare diametro esterno