


BUSSOLE GUIDA RL
Bussole con codolo di centraggio

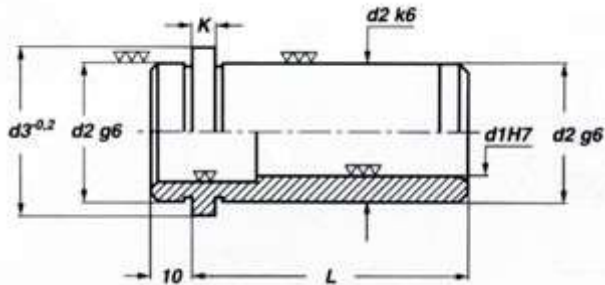

Acciaio UNI 16CrNi4 Cementate e temprate HRC 60÷62

d1	d2	d3	K	L												
				16	26	36	46	56	66	76	86	96	106	116	126	146
16	22	26	5	•	•	•	•	•	•	•	•	•				
20	28 30*	32 34*	6		•	•	•	•	•	•	•	•				
25	34 36*	38 40*	7		•	•	•	•	•	•	•	•				
32	40	45	7			•	•	•	•	•	•	•	•	•	•	•
40	48	52	8				•	•	•	•	•	•	•	•	•	•

Per ordinare specificare RL d1 x L + 10 es. RL 25 x 76 + 10