


COLONNE P

Colonne guida a 1 diametro temprate

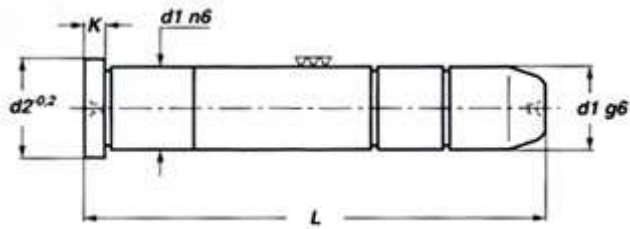

MATERIALE: Acciaio UNI 16NiCr4 60-62 HRC

d1	10	12	14	16	18	20	25	32	40	50	60
d2	14	16	18	20	22	24	30	37	45	55	68
K	4	5	5	5	5	6	7	7	8	10	12
L	L1										
50	13	•	•	•	•	•					
60	15	•	•	•	•	•	•				
70	15	•	•	•	•	•	•				
80	20	•	•	•	•	•	•	•			
90	20	•	•	•	•	•	•	•			
100	25	•	•	•	•	•	•	•			
110	25			•	•	•	•				
120	25	•	•	•	•	•	•	•	•		
130	25			•	•	•	•				
140	30	•	•	•	•	•	•	•	•		
150	30			•	•	•	•				
160	35	•	•	•	•	•	•	•	•		
180	40			•	•	•	•	•	•		
200	40				•	•	•	•	•		
220	50				•	•	•	•	•		
240	50						•	•	•	•	
260	50						•	•	•	•	
280	50						•	•	•	•	
300	60						•	•	•	•	
350	70							•	•	•	•
400	80							•	•	•	•
450	90								•	•	•
500	100								•	•	•
600	110									•	•
800	110										•

Per ordinare specificare P d1 x L es. P 20 x 100